

Hard-usage wiring device series with high mechanical and environmental protection.

- Series Components:**
- RL 80*** Male plug with neoprene weatherproofing boot and locking ring
 - RL 86*** Female inline receptacle with coupler to mate with male plug, threaded cap included
 - RL 96*** Female FS box mount receptacle to mate with male plug, threaded cap included

Applications:

- Oilwell Drilling and Service Rigs
- Refineries
- Petro-Chemical Installations
- Agriculture
- Forestry
- Mining

Certifications

- CSA Class 4413-02/82
- CSA C22.2 No. 18.1-04



Key Features


- Receptacle for mounting on standard FS type device box, supplied with stainless steel screws
- Neoprene rubber boots resistant to sunlight and petro-chemicals
- CNC machined threads for ease of connection
- Weatherproof when mated
- Compatible with other industry brands

Options

- Standard in 15A, 125V NEMA 5-15
- 'B' suffix to denote 15/20A, 125V NEMA 5-20 (T)
- 'C' suffix to denote 20A, 250V NEMA 6-20 (T)
- 'D' suffix to denote 15A, 125V locking NEMA L5-15




Receptacle View Shown

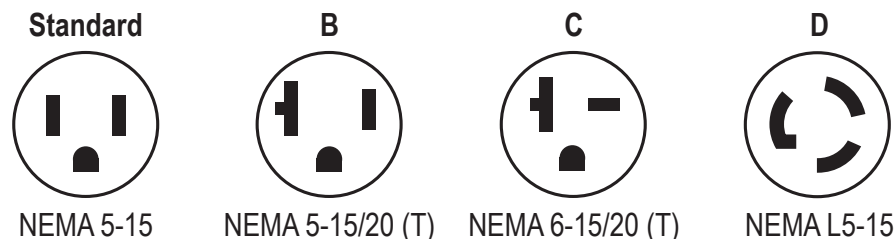


DEVICE COMPONENTS

RL 80

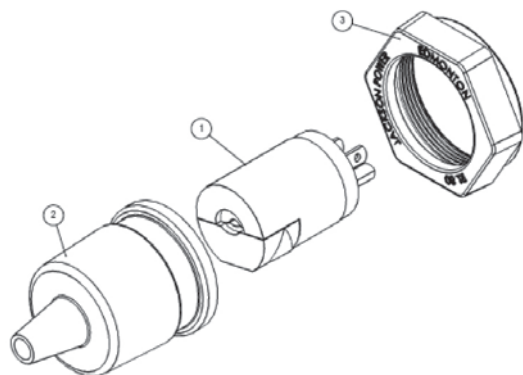


Item	Part No.	Description	Model		NEMA
1.	RL80-01	Component Plug	--	15A, 125V	5-15P
	RL80-B1		B	20A, 125V	5-20P
	RL80-C1		C	20A, 250V	6-15/20P
	RL80-D1		D	15A, 125L	L5-15P
2.	BOOTRL80	Weatherproofing Boot			
3.	NUTRL80	Threaded Nut			

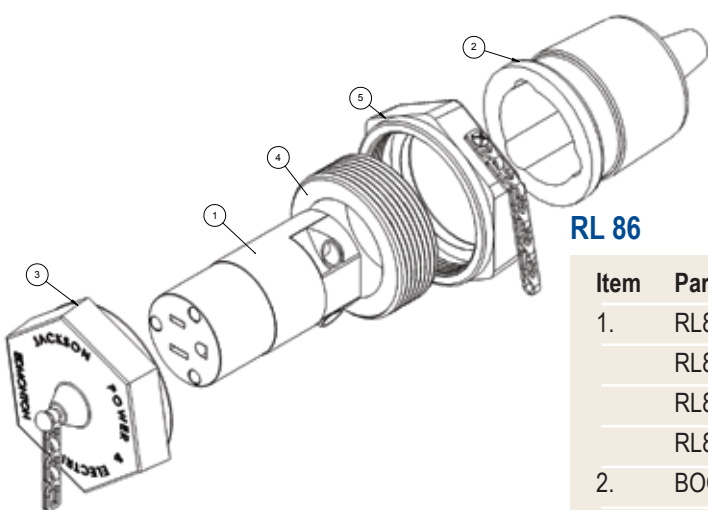

RL 86

Item	Part No.	Description	Model		NEMA
1.	RL86-01	Component	--	15A, 125V	5-15P
	RL86-B1	Cord Connector	B	20A, 125V	5-20P
	RL86-C1		C	20A, 250V	6-15/20P
	RL86-D1		D	15A, 125L	L5-15P
2.	BOOTRL80	Weatherproofing Boot			
3.	CAPRL96	Threaded Cap			
4.	COUPLERRL86	Threaded Coupler			
5.	NUTRL86	Captive Nut			

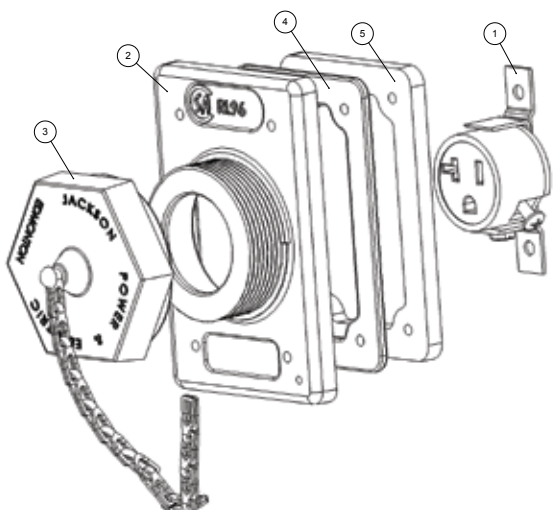

RL 96

Item	Part No.	Description	Model		NEMA
1.	RL96-01	Component	--	15A, 125V	5-15P
	RL96-B1	Receptacle	B	20A, 125V	5-20P
	RL96-C1		C	20A, 250V	6-15/20P
	RL96-D1		D	15A, 125L	L5-15P
2.		Plate; not replaceable			
3.	CAPRL96	Threaded Cap			
4.	GASK96NS	Gasket; Solid			
5.	GASK96	Gasket; Sponge			